


## Historic, archived document



Do not assume content reflects current scientific knowledge, policies, or practices





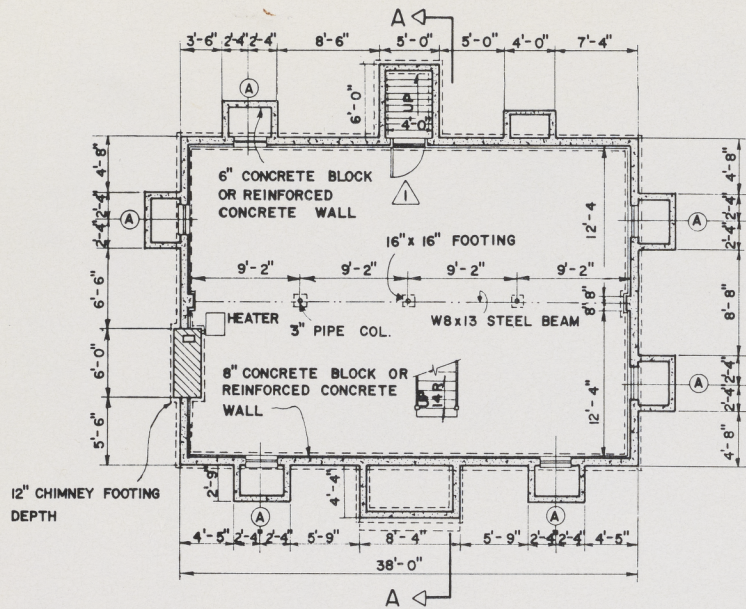


**BASEMENT FLOOR PLAN**

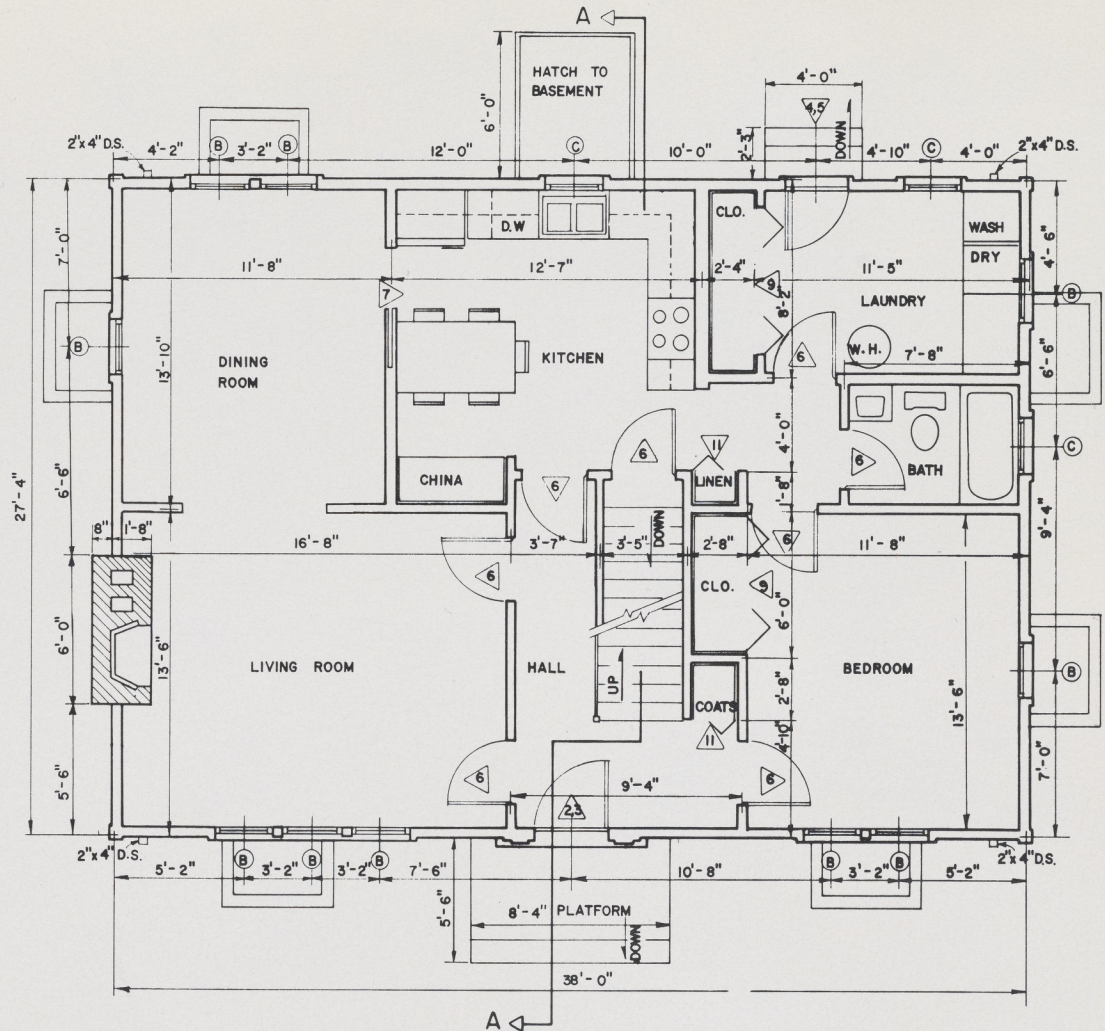

**FIRST FLOOR PLAN**

2052 SQ FT HEATED AREA



**PERSPECTIVE (NO SCALE)**

WINDOW SCHEDULE			
MARK	SIZE	TYPE	#REQ'D
A	2'-8" x 1'-6"	BASEMENT SASH	6
B	2'-8" x 4'-6"	DOUBLE HUNG SASH	10
C	2'-4" x 3'-2"	DOUBLE HUNG SASH	3
D	2'-8" x 3'-10"	DOUBLE HUNG SASH	14
E	2'-4" x 3'-2"	DOUBLE HUNG SASH	2

ALL USE INSULATED GLASS AND INCLUDE SCREENS AND STORM SASH.

COOPERATIVE EXTENSION SERVICE  
AGRICULTURE AND HOME ECONOMICS

AND  
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING


**5 BEDROOM HOUSE**

USDA '65 7181 SHEET 1 OF 3



REV '86




DOOR SCHEDULE			
MARK	SIZE	TYPE	#REQ'D
1	3'-0" x 6'-8"	SOLID CORE EXTERIOR--GLAZED	1
2	3'-0" x 6'-8"	SOLID CORE EXTERIOR	1
3	3'-0" x 6'-8"	SCREEN AND/OR STORM	1
4	3'-0" x 6'-8"	SOLID CORE EXTERIOR--GLAZED	1
5	3'-0" x 6'-8"	SCREEN AND/OR STORM	1
6	2'-8" x 6'-8"	HOLLOW CORE INTERIOR	14
7	2'-8" x 6'-8"	HOLLOW CORE INTERIOR--GLAZED	1
8	1'-8" x 6'-8"	HOLLOW CORE INTERIOR	1
9	3'-0" x 6'-8"	BI-FOLD	8
10	5'-0" x 6'-8"	FOUR-FOLD	2
11	2'-0" x 6'-8"	BI-FOLD	4

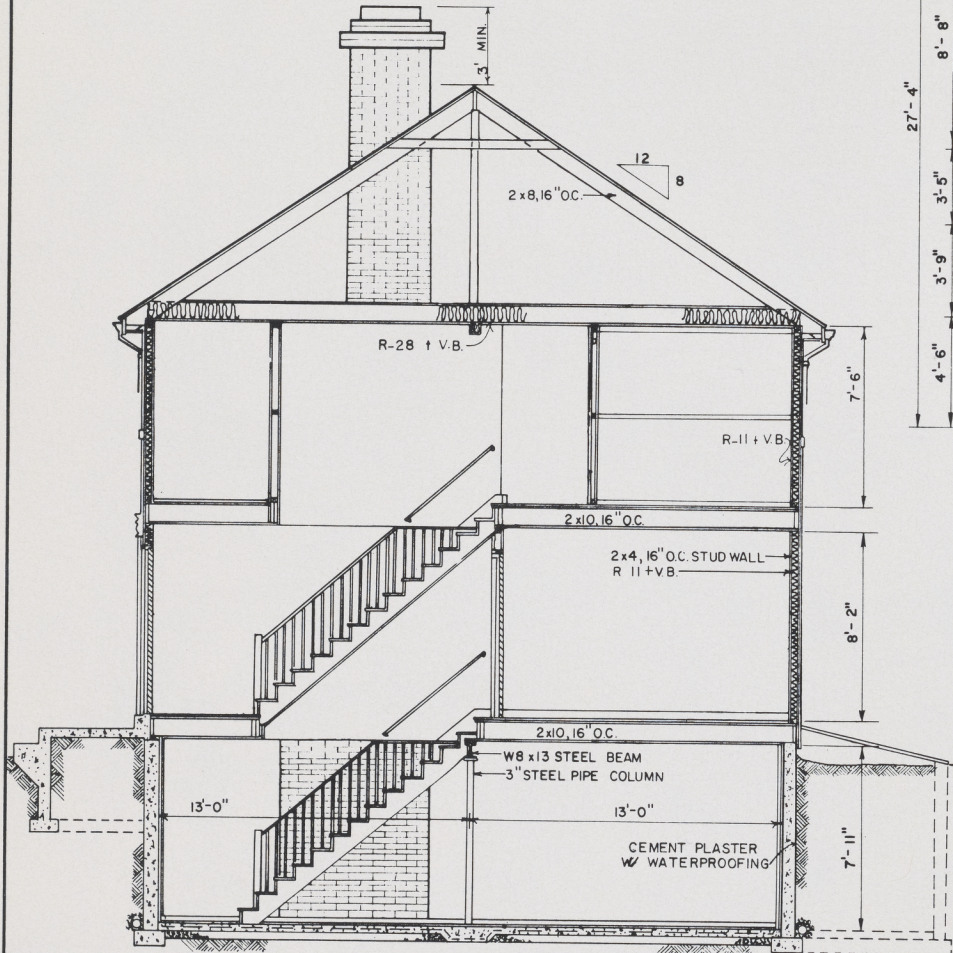

SECTION A-A

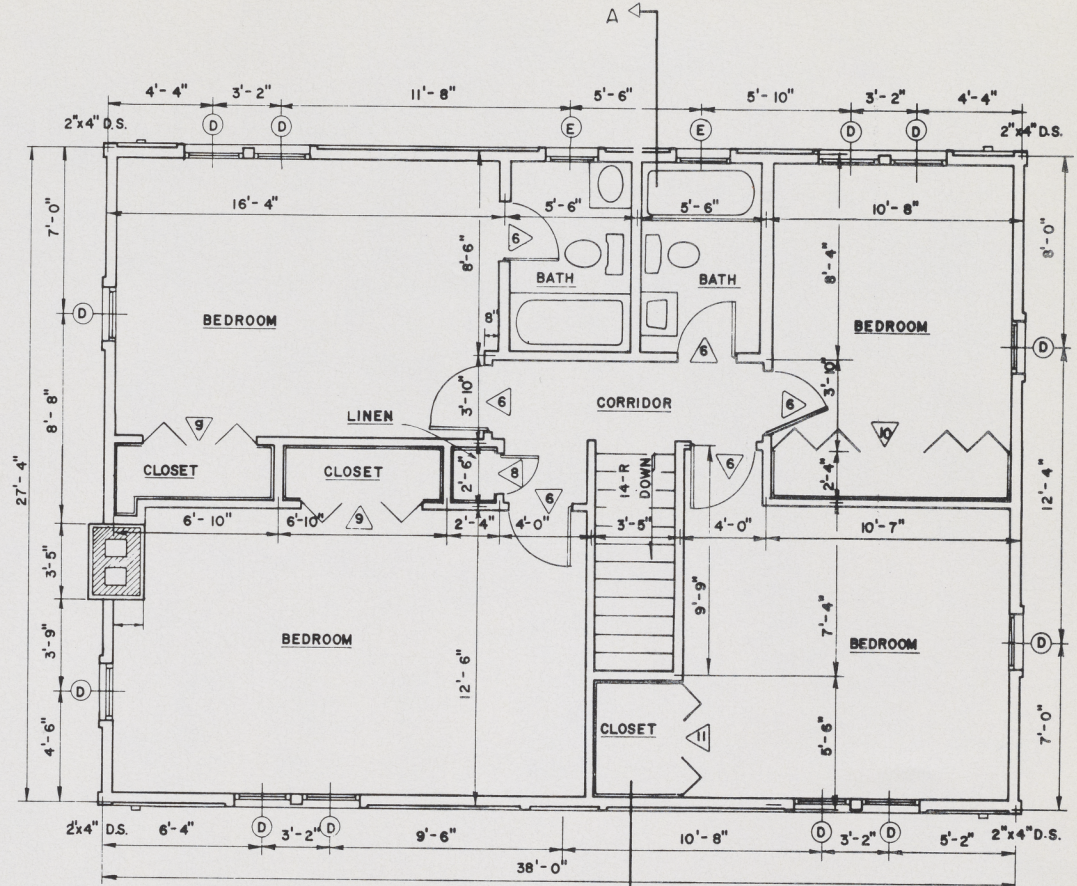

SECOND FLOOR PLAN



CONSTRUCTION CHECK LIST

- CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. RAFTERS MEET 45 LB SQ/FT TOTAL LOAD DESIGN CRITERIA.
- ADEQUATELY NAIL AND ANCHOR JOINTS.
- DOUBLE JOISTS UNDER TUBS AND OTHER HEAVY LOADS.
- SHEATH CORNERS WITH 1/2" PLYWOOD OR HIGH DENSITY FIBERBOARD OR USE DIAGONAL BRACING.
- USE EXTERIOR GLUED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
- PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
- R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
- PROVIDE 1 SQ FT OF ATTIC VENT OPENINGS FOR EACH 150 SQ FT OF CEILING.
- WEATHERIZE ALL OPENINGS AND JOINTS.

COOPERATIVE EXTENSION SERVICE  
AGRICULTURE AND HOME ECONOMICS





AND  
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

5 BEDROOM HOUSE

USDA '65 7181 SHEET 2 OF 3

REV '86



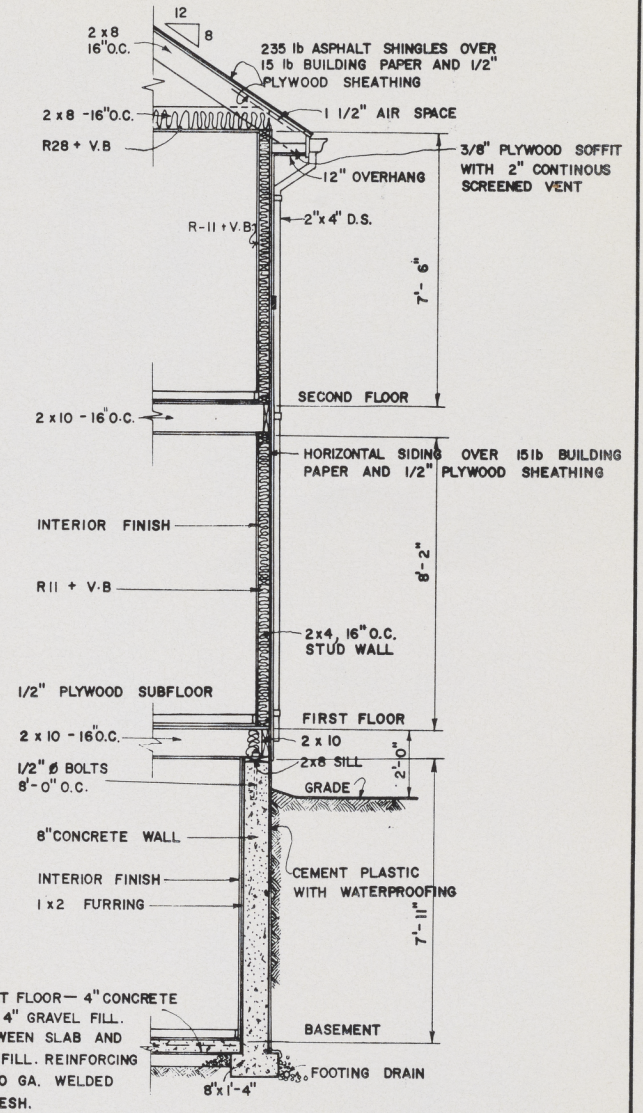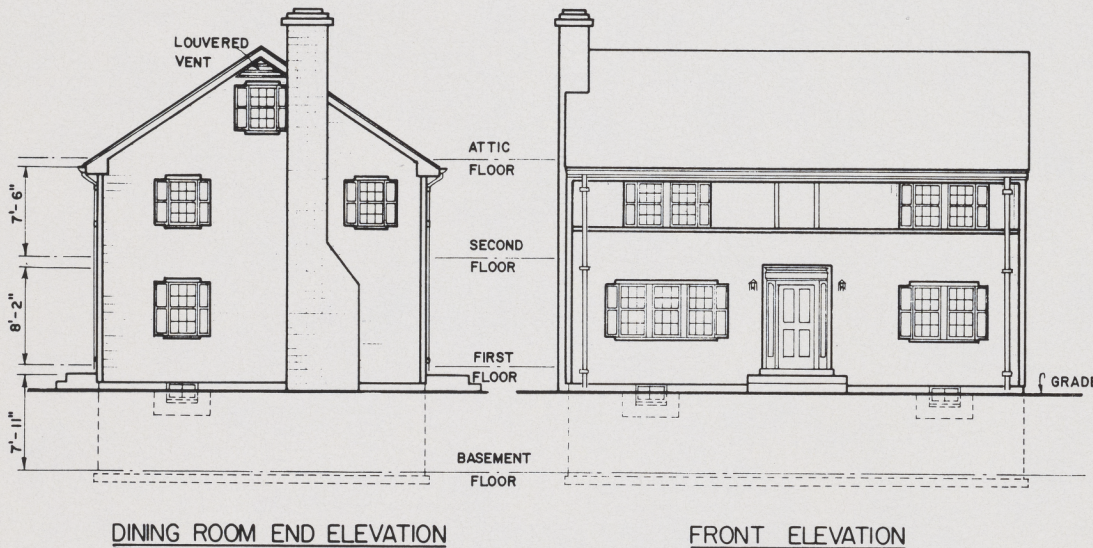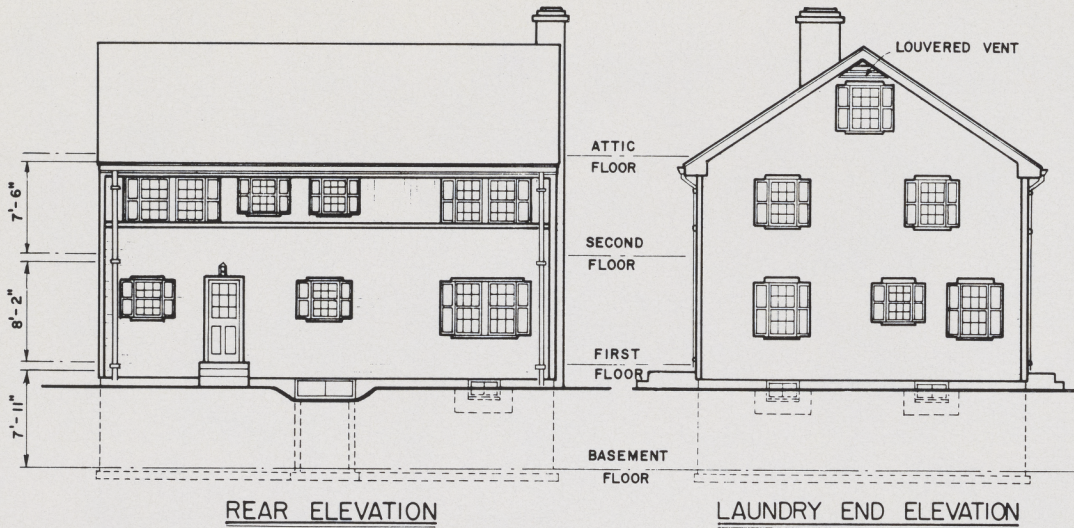

BASEMENT FLOOR— 4" CONCRETE SLAB ON 4" GRAVEL FILL. V.B. BETWEEN SLAB AND GRAVEL FILL. REINFORCING 6 x 6 10 GA. WELDED WIRE MESH.

COOPERATIVE EXTENSION SERVICE AGRICULTURE AND HOME ECONOMICS		
AND UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING		
5 BEDROOM HOUSE		
USDA '65	7181	SHEET 3 OF 3
REV '86		